
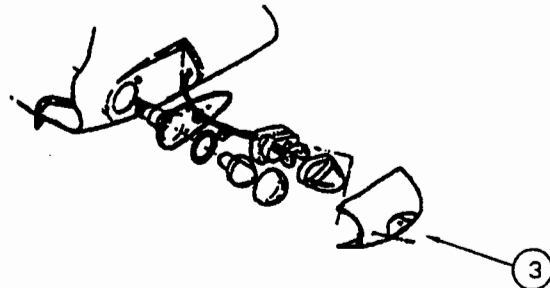


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

CESSNA, WING TIP FAIRING INSTALLATION

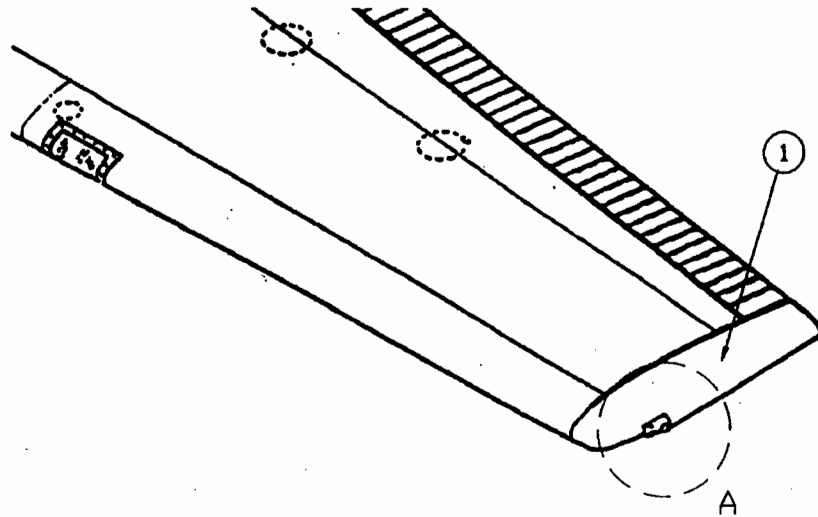

DETAIL A

INSTALLATION NOTES:

INSTALL PARTS IN ACCORDANCE WITH ACCEPTED METHODS AND PROCEDURES AS OUTLINED IN FAA REGULATIONS PART 43.13 AND ASSOCIATED PUBLICATION 'AIRFRAME AND POWERPLANT MECHANICS' AC65-15A

THIS WING TIP FAIRING CONSISTS OF A SINGLE PART, P/N 1819-01 L/H (-02 R/H). THEY ARE DIRECT REPLACEMENTS FOR THE FACTORY ORIGINALS. ACCORDINGLY THEY SHOULD BE INSTALLED IN THE SAME MANNER AS THE ORIGINALS. ANY ATTENDANT PARTS SUCH AS FASTENERS, CLIPS AND THE NAV LIGHT, (DETAIL A), SHOULD BE REATTACHED AS PER THE ORIGINAL INSTALLATION

REMOVE EXISTING WING TIP BY UNSCREWING THE 12 FASTENERS. INSTALLATION IS BASICALLY THE REVERSE OF THE REMOVAL.

AROUND THE WING TIP FAIRING, MATCH DRILL THE SCREW HOLES. DRILL ALSO THE NAV LIGHT HOLE AS PER THE ORIGINAL TIP.

ATTACH TIP FAIRING TO THE WING TIP WITH THE NAV LIGHT WIRING PASSING THROUGH THE NAV LIGHT HOLE.

CONNECT NAV LIGHT AS PER THE ORIGINAL INSTALLATION AND ATTACH THE NAV LIGHT TO THE TIP USING THE ORIGINAL HARDWARE

COMPLETE FAA FORM -337. NO WEIGHT CHANGE. *INSTALLED MET-CO-AIRE FIBERGLASS REPLACEMENT WING TIP FAIRING IN ACCORDANCE WITH INSTALLATION DRAWING #MCA3-7-000

PROPRIETARY NOTICE

THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF STRONG AEROSTRUCTURES ENGINEERING, AND ANY DISCLOSURE OF THE CONTENTS TO OTHERS IS GIVEN IN CONFIDENCE. THIS MATERIAL MUST NOT BE REPRODUCED OR COPIED OR OTHERWISE DISCLOSED IN WHOLE OR IN PART WITHOUT THE SPECIFIC APPROVAL OF STRONG AEROSTRUCTURES ENGINEERING, CA 94025. THE INFORMATION CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT THE WRITTEN PERMISSION OF STRONG AEROSTRUCTURES ENGINEERING COPYRIGHT © 2004.

PART NO	DESCRIPTION	MATERIAL	SIZE / SPECIFICATION	ITEM HD.
-	NAVIGATION LIGHT ASSEMBLY	(REF. ONLY)		2
1819-01	CESSNA WING TIP FAIRING L/H			1
N/A	CESSNA MODEL: 172A/N/P/B/RG R172K 180J/K 182P/Q/RT, R182 TR182 185 182GF/G, TU204G	ALLEN BRONZE BRASS BRASS 6061 AL 6061 2024 AL 6061	STRONG AEROSTRUCTURES ENGINEERING www.strongero.com	STRONG AEROSTRUCTURES ENGINEERING CESSNA, WING TIP FAIRING INSTALLATION
APP. DATE	APPROVED	DATE	REV.	REV.
07/28/01	I. STRONG	07/28/01	1	1
07/28/01	I. STRONG	07/28/01	2	2
07/28/01	I. STRONG	07/28/01	3	3
07/28/01	I. STRONG	07/28/01	4	4
07/28/01	I. STRONG	07/28/01	5	5
07/28/01	I. STRONG	07/28/01	6	6
07/28/01	I. STRONG	07/28/01	7	7
07/28/01	I. STRONG	07/28/01	8	8
07/28/01	I. STRONG	07/28/01	9	9
07/28/01	I. STRONG	07/28/01	10	10
07/28/01	I. STRONG	07/28/01	11	11
07/28/01	I. STRONG	07/28/01	12	12
07/28/01	I. STRONG	07/28/01	13	13
07/28/01	I. STRONG	07/28/01	14	14
07/28/01	I. STRONG	07/28/01	15	15
07/28/01	I. STRONG	07/28/01	16	16
07/28/01	I. STRONG	07/28/01	17	17
07/28/01	I. STRONG	07/28/01	18	18
07/28/01	I. STRONG	07/28/01	19	19
07/28/01	I. STRONG	07/28/01	20	20
07/28/01	I. STRONG	07/28/01	21	21
07/28/01	I. STRONG	07/28/01	22	22
07/28/01	I. STRONG	07/28/01	23	23
07/28/01	I. STRONG	07/28/01	24	24
07/28/01	I. STRONG	07/28/01	25	25
07/28/01	I. STRONG	07/28/01	26	26
07/28/01	I. STRONG	07/28/01	27	27
07/28/01	I. STRONG	07/28/01	28	28
07/28/01	I. STRONG	07/28/01	29	29
07/28/01	I. STRONG	07/28/01	30	30
07/28/01	I. STRONG	07/28/01	31	31
07/28/01	I. STRONG	07/28/01	32	32
07/28/01	I. STRONG	07/28/01	33	33
07/28/01	I. STRONG	07/28/01	34	34
07/28/01	I. STRONG	07/28/01	35	35
07/28/01	I. STRONG	07/28/01	36	36
07/28/01	I. STRONG	07/28/01	37	37
07/28/01	I. STRONG	07/28/01	38	38
07/28/01	I. STRONG	07/28/01	39	39
07/28/01	I. STRONG	07/28/01	40	40
07/28/01	I. STRONG	07/28/01	41	41
07/28/01	I. STRONG	07/28/01	42	42
07/28/01	I. STRONG	07/28/01	43	43
07/28/01	I. STRONG	07/28/01	44	44
07/28/01	I. STRONG	07/28/01	45	45
07/28/01	I. STRONG	07/28/01	46	46
07/28/01	I. STRONG	07/28/01	47	47
07/28/01	I. STRONG	07/28/01	48	48
07/28/01	I. STRONG	07/28/01	49	49
07/28/01	I. STRONG	07/28/01	50	50
07/28/01	I. STRONG	07/28/01	51	51
07/28/01	I. STRONG	07/28/01	52	52
07/28/01	I. STRONG	07/28/01	53	53
07/28/01	I. STRONG	07/28/01	54	54
07/28/01	I. STRONG	07/28/01	55	55
07/28/01	I. STRONG	07/28/01	56	56
07/28/01	I. STRONG	07/28/01	57	57
07/28/01	I. STRONG	07/28/01	58	58
07/28/01	I. STRONG	07/28/01	59	59
07/28/01	I. STRONG	07/28/01	60	60
07/28/01	I. STRONG	07/28/01	61	61
07/28/01	I. STRONG	07/28/01	62	62
07/28/01	I. STRONG	07/28/01	63	63
07/28/01	I. STRONG	07/28/01	64	64
07/28/01	I. STRONG	07/28/01	65	65
07/28/01	I. STRONG	07/28/01	66	66
07/28/01	I. STRONG	07/28/01	67	67
07/28/01	I. STRONG	07/28/01	68	68
07/28/01	I. STRONG	07/28/01	69	69
07/28/01	I. STRONG	07/28/01	70	70
07/28/01	I. STRONG	07/28/01	71	71
07/28/01	I. STRONG	07/28/01	72	72
07/28/01	I. STRONG	07/28/01	73	73
07/28/01	I. STRONG	07/28/01	74	74
07/28/01	I. STRONG	07/28/01	75	75
07/28/01	I. STRONG	07/28/01	76	76
07/28/01	I. STRONG	07/28/01	77	77
07/28/01	I. STRONG	07/28/01	78	78
07/28/01	I. STRONG	07/28/01	79	79
07/28/01	I. STRONG	07/28/01	80	80
07/28/01	I. STRONG	07/28/01	81	81
07/28/01	I. STRONG	07/28/01	82	82
07/28/01	I. STRONG	07/28/01	83	83
07/28/01	I. STRONG	07/28/01	84	84
07/28/01	I. STRONG	07/28/01	85	85
07/28/01	I. STRONG	07/28/01	86	86
07/28/01	I. STRONG	07/28/01	87	87
07/28/01	I. STRONG	07/28/01	88	88
07/28/01	I. STRONG	07/28/01	89	89
07/28/01	I. STRONG	07/28/01	90	90
07/28/01	I. STRONG	07/28/01	91	91
07/28/01	I. STRONG	07/28/01	92	92
07/28/01	I. STRONG	07/28/01	93	93
07/28/01	I. STRONG	07/28/01	94	94
07/28/01	I. STRONG	07/28/01	95	95
07/28/01	I. STRONG	07/28/01	96	96
07/28/01	I. STRONG	07/28/01	97	97
07/28/01	I. STRONG	07/28/01	98	98
07/28/01	I. STRONG	07/28/01	99	99
07/28/01	I. STRONG	07/28/01	100	100

I. Strong

REPORT REF: MCA3-8-01

**INSTRUCTIONS FOR CONTINUED AIRWORTHINESS
FOR MET-CO-AIRE REPLACEMENT WING TIP FAIRINGS
INSTALLED ON CESSNA AIRCRAFT UNDER
STC SA01204LA**

Modification of an aircraft by this Supplemental Type Certificate obligates the Aircraft Operator to include the maintenance information provided by this document in the Operator's Maintenance Manual and the Operator's Aircraft Scheduled Maintenance Program

MET-CO-AIRE 13965 E. STAGE RD. UNIT G SANTA FE SPRINGS CA 90670

TEL: (800) 814 2697 FAX: (562) 802 3306

TABLE OF CONTENTS

	PAGE
1 PURPOSE	3
2 AIRWORTHINESS LIMITATIONS	3
3 SCHEDULED MAINTENANCE AND INSPECTIONS.....	3
4 REFERENCE DOCUMENTS.....	4
5 SPECIAL TOOLS.....	4

REVISION TABLE

REVISION	DATE	CHANGE
N/C	08/02/01	

1 PURPOSE

- 1.0 This document provides procedures for conducting regular and non-scheduled maintenance to supplement existing airplane manufacture's procedures as they pertain to the added or modified equipment described below.
- 1.1 This report (and the procedures it contains or invokes) constitutes compliance with FAR Part 25-1529, amendment 25-54 and Part 25 Appendix H.
- 1.2 These instructions are designed to provide guidance for the continued airworthiness and applicable maintenance requirements for Met-Co-Aire fiberglass replacement wing tip fairing P/N1819-01 L/H (and -02 R/H). These parts are constructed of 6oz cloth and 1½ oz mat in a polyester resin matrix. Any repair performed should be made appropriate to these materials.

2 AIRWORTHINESS LIMITATIONS

NOTE: THE AIRWORTHINESS LIMITATIONS SECTION IS FAA APPROVED AND SPECIFIES MAINTENANCE REQUIRED UNDER PART 43.16 AND 91.163 UNLESS AN ALTERNATIVE PROGRAM HAS BEEN APPROVED.

- 2.0 The documentation contained herein does not constitute complete Instructions for Continued Airworthiness. This document must be combined with any existing previously FAA approved Instructions for Continued Airworthiness.

3 SCHEDULED MAINTENANCE AND INSPECTIONS

- 3.0 All additional inspection procedures and intervals called for herein should be accomplished in accordance with the operator/owners FAA approved maintenance and inspection program
- 3.1 Scheduled Maintenance Program tasks which should be added to the aircraft operator's appropriate airplane maintenance program are listed below:

During pre-flight walk around, verify that the screws holding the wing tip fairing and nav' light in place are tight and secure.

Remove wing tip fairing for complete inspection at every scheduled maintenance event, i.e. annuals, 100 hour, etc.

Visually examine the structural integrity of the part is complete. Look for damage such as cracks, splits, breaks in the part, etc.

If any damage has occurred, classify it into one of the following three categories:

- A) COSMETIC: This would include minor scratches, dents, dings, etc. Normally they are small and occur only in the gel coat finish. Repair is usually sanding with some minor amount of filler being applied. Paint and return to service.
- B) MINOR: This would be a definitive crack in the part that would be visible as a white line when viewed from the *inside* of the part. Here the integrity of the part has been compromised. Repair with an appropriate cloth or mat reinforcement over the damaged area, fill and sand the outside of the damaged area. Paint and return to service.
- C) MAJOR: This would be a larger tear, crack or break in the part. Generally speaking over 2 inches in length. Here the *fibers* on the inside of the part are either visible or broken completely. In this case, the part should be replaced. This would include *any* damage to the screw hole mounting areas.

Any maintenance questions, or to order new parts, please call toll free 1-800-814-2697

4 REFERENCE DOCUMENTS

4.0 The following documents referenced in this report or are pertinent to the Instructions for Continued Airworthiness:

<u>DOCUMENT</u>	<u>SOURCE</u>	<u>DOCUMENT TITLE</u>
MCA3-1-02	MET-CO-AIRE	MASTER DRAWING LIST
MCA3-7-000	MET-CO-AIRE	CESSNA, WING TIP FAIRING INSTALLATION

5 SPECIAL TOOLS

5.0 No special tools are required to maintain the noted equipment. All tools required to remove, replace, and inspect the wing tip fairing may be considered "standard" by aircraft industry standards.